


Qdos 60 Universal and Universal+ pumps with 110V Logic

qdos60
Peristaltic Metering

Watson-Marlow Pumps

FEATURES AND BENEFITS


- Flow rates 0.1-1000 ml/min at 7bar (100psi) RMS pressure
- ReNu pumphead provides accurate, linear and repeatable low pulse flow under varying process conditions
- Process uptime is maximised with no gas-locking, no valve blocking and rapid no-tools pumphead replacement
- Flow control 10000:1 with $\pm 1\%$ accuracy
- Contained pumphead with integral leak detection
- Manual, analog and 110V digital input and output functionality
- Intuitive HMI with 89mm (3.5") color TFT display
- High suction lift ensures self priming and metering of viscous fluids



Watson-Marlow...Innovation in Full Flow

PERFORMANCE

Flow rate with discharge pressure for ReNu 60 pumpheads

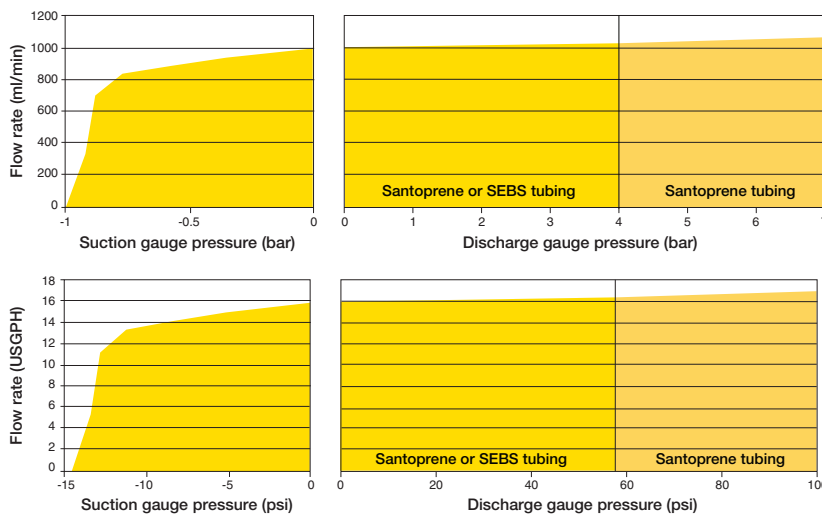

Qdos 60 pump typical flow rates

	Speed (rpm)	Flow (ml/min)*
ReNu 60 Pumphead	0.025-125	0.1-1000
	Speed (rpm)	Flow (USGPH)*
ReNu 60 Pumphead	0.016-125	0.001-15.85

*accuracy $\pm 1\%$, repeatability $\pm 0.5\%$

The graphs show the flow performance for pumpheads with Santoprene tubing. Pumpheads with SEBS tubing will have slightly higher flow performance.


TECHNICAL DATA

Functionality	Qdos 60 Universal 110V logic	Qdos 60 Universal+ 110V logic
Operational modes		
Manual	•	•
4-20mA	•	•
Fluid recovery	•	•
Fault reporting	•	•
Leak detection	•	•
Manual control		
Flow rate range 0.1 to 1000 ml/min (10000:1)	•	•
Numerical flow display	•	•
Numerical speed display	•	•
Numerical percentage of max speed display	•	•
Fluid level monitor	•	•
Max (prime)	•	•
Auto restart	•	•
Fluid recovery	•	•

TECHNICAL DATA

Functionality	Qdos 60 Universal 110V logic	Qdos 60 Universal+ 110V logic
Remote control		
4-20mA input	•	•
4-20mA output		•
Run stop input	•	•
Run status output	•	•
Alarm output	•	•
Security		
Keypad lock	•	•
PIN lock to protect set up	•	•

DIMENSIONS

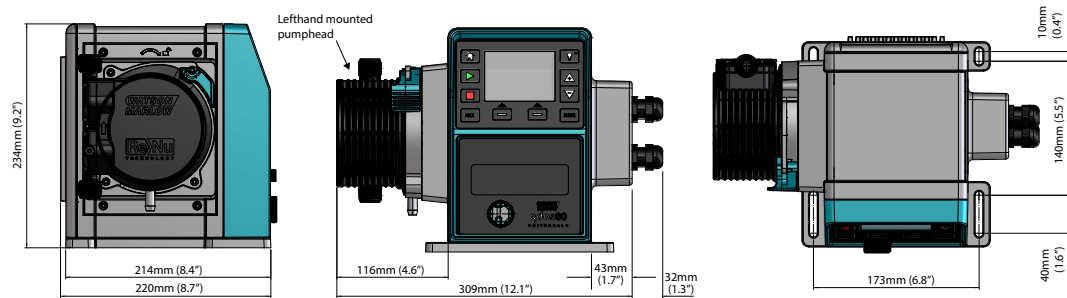

TECHNICAL SPECIFICATION


	Qdos 60 Universal and Universal+
Ingress rating	IP66
Enclosure	Watertight / dustproof
Humidity	Non-condensing 5% to 95%
Temperature	5C to 45C (41F to 113F)
Pump weight	Drive: 4.6kg (10lb 2oz) Pumphead: 1.1kg (2lb 7oz)
Control ratio	10000:1 with ±1% accuracy
Noise	< 70dB(A) at 1m
Standard	CE, NSF 61, cETLus
Power supply	Switch mode power supply ~100-240V 50-60Hz 190VA

MATERIALS OF CONSTRUCTION

Component	Material
Keypad	Polyester
Drive casework	20% Glass filled PPE/ PS
Drive shaft	Stainless steel 440C
Pumphead enclosure	30% Glass filled PPE/PS
Rotor	Glass filled nylon
Rotor bearings	Steel
Tube†	Santoprene (max 7 bar, 100 psi) SEBS (max 4 bar, 60 psi)
Pumphead hydraulic ports	Polypropylene (Santoprene) PVDF (SEBS)
Hydraulic connectors	Polypropylene
Lubricant	PFPE based

*The ReNu Pumphead contains lubricant. It is the user's responsibility to comply with local health and safety regulations, including ensuring chemical compatibility between the lubricant and the duty fluid before use. For guidance refer to www.wmftg.com/chemical

ORDER INFORMATION

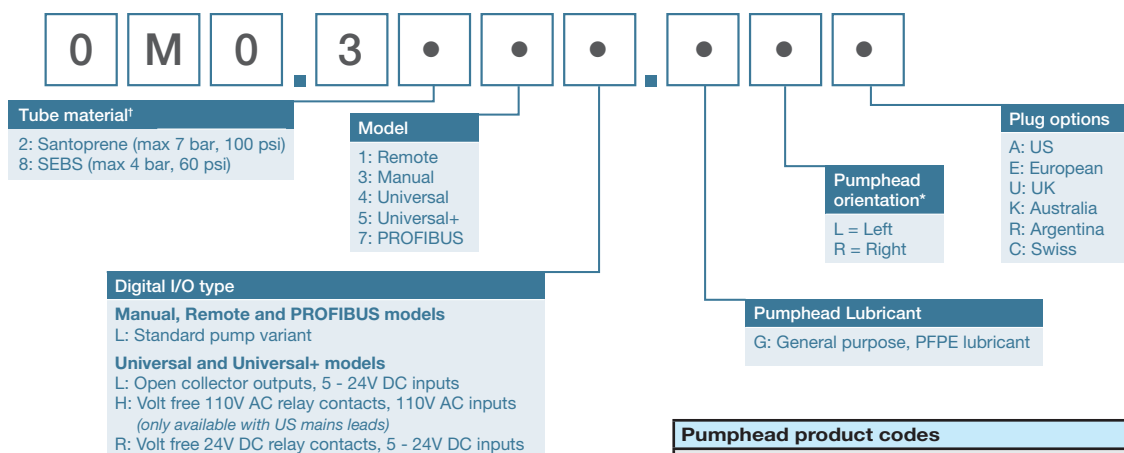

† For guidance on chemical compatibility see www.qdospumps.com

* The pumphead side location is required when ordering. The left/right perspective assumes the user is looking at the front of the pump. The pump in the dimensions diagram is considered a pumphead located to the left.

Pumphead product codes	
Description	Partcode
ReNu 60 pumphead Santoprene / PFPE 7 bar (100psi)	0M3.3200.PFP
ReNu 60 pumphead SEBS / PFPE 4 bar (60psi)	0M3.3800.PFP

All flow rates shown were obtained pumping water at 20C (68F) with zero suction and delivery heads.
Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the users responsibility to ensure product suitability for use within their application. Watson-Marlow, Qdos, ReNu, LoadSure, Bioprene, Pumpsil and Marprene are trademarks of Watson-Marlow Limited. STA-PURE PFL® and STA-PURE PCS® are registered trademarks of W.L. Gore & Associates Inc. Please state the product code when ordering pumps and tubing.

**WATSON
MARLOW
Pumps**

wmftg.co.uk
info@wmftg.co.uk
+44 (0) 1326 370370